USC
University
of Southern
California

Nanophotonics and Microcavities for Dense WDM Systems

Dan Dapkus and John O'Brien

The Photonics Center @ USC

Integrated Nanophotonic Technology

USC
University of Southern California

Photonic Crystal Defect Nanolasers

Photonic Crystal Waveguide Components

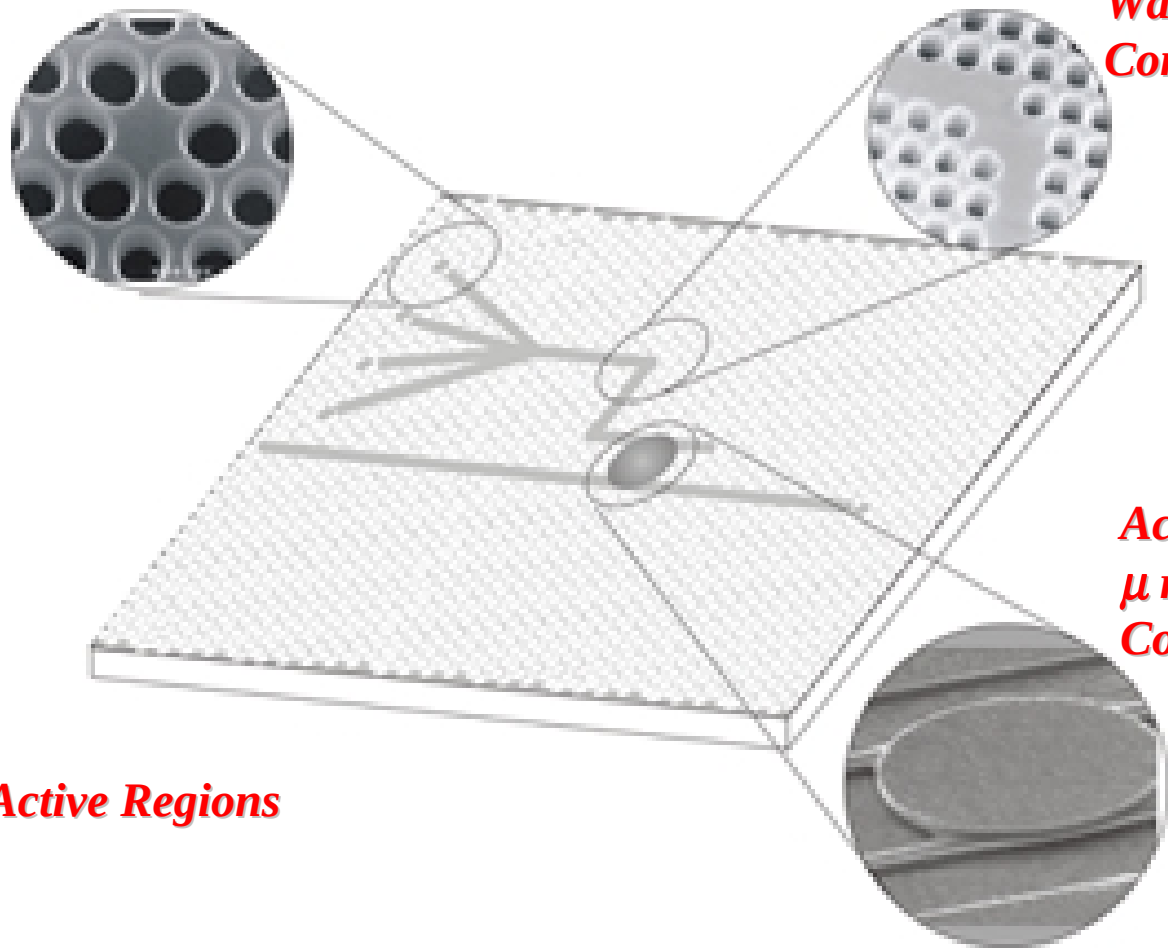

Active and Passive μ resonator Components

QW and QD Active Regions

μ Disk and Photonic Crystal Devices for DWDM Systems

USC
University of Southern California

- **High Density Integrated Systems**

  VLSI Photonic Integrated Circuits

- **Compact, Low Power Components**

  Millimeters ⟶ Microns

- **Single or Multi-wavelength Resonant Components**
- **New Functionality in Active Components**

Integrable Nanophotonic Components

USC University of Southern California

- *DWDM μ-Disk and Nanolasers and Arrays*
- *Tunable Lasers*
- *Dispersive, Superprism Propagation*
- *Low Voltage, High Bit Rate Modulators*
- *Wavelength Selective Switches*
- *Narrow Band Tunable Filters and Detectors*
- *Wavelength Selective Couplers and Splitters*
- *Chemical and Biological Sensor Elements*
- *Waveguide to Fiber Couplers*

Nanophotonic Technologies

USC
University of Southern California

- ***High Q Resonators***

✓ ***Heterogeneous Integration***

✓ ***Electron Beam Lithography***

✓ ***Highly Asymmetric Dry Etching***

✓ ***Selective Area Epitaxy***

✓ ***QW and QD Active Regions***

Selectively Grown Active Regions

USC University of Southern California

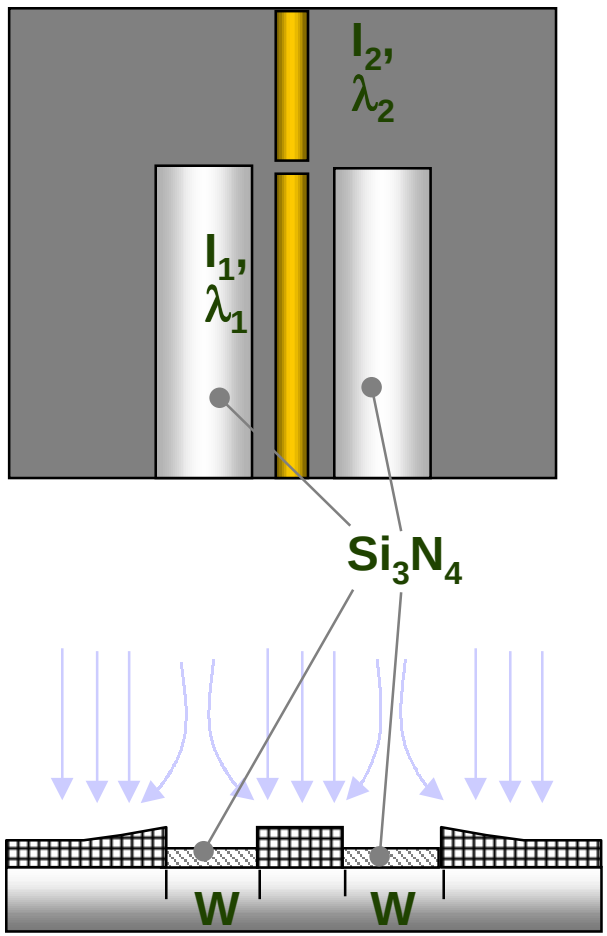

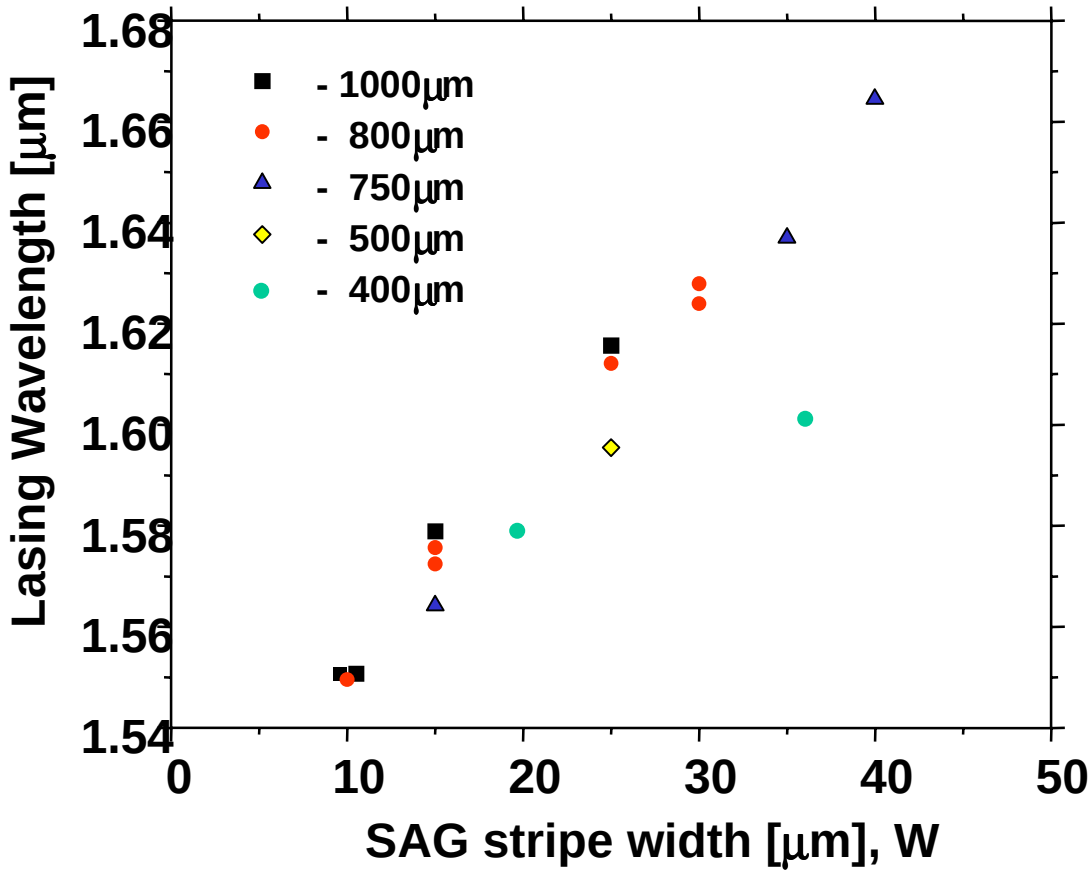

USC
University of Southern California

Resonant Cavity Structures

r = 135 nm
a = 400 nm

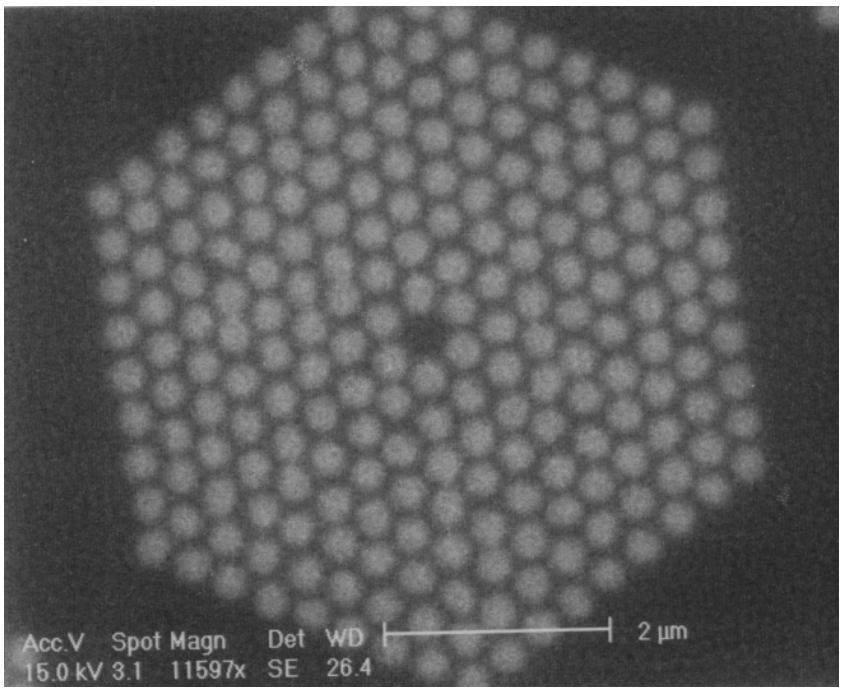

After Lithography

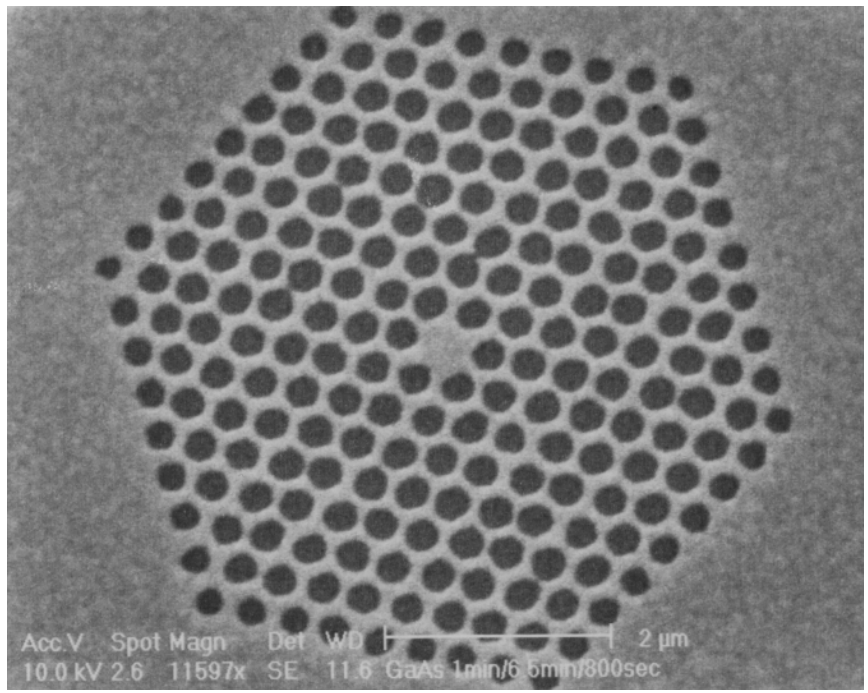

After RIE Etch

USC University of Southern California

Top Views of GaAs PBGs after ECR etch

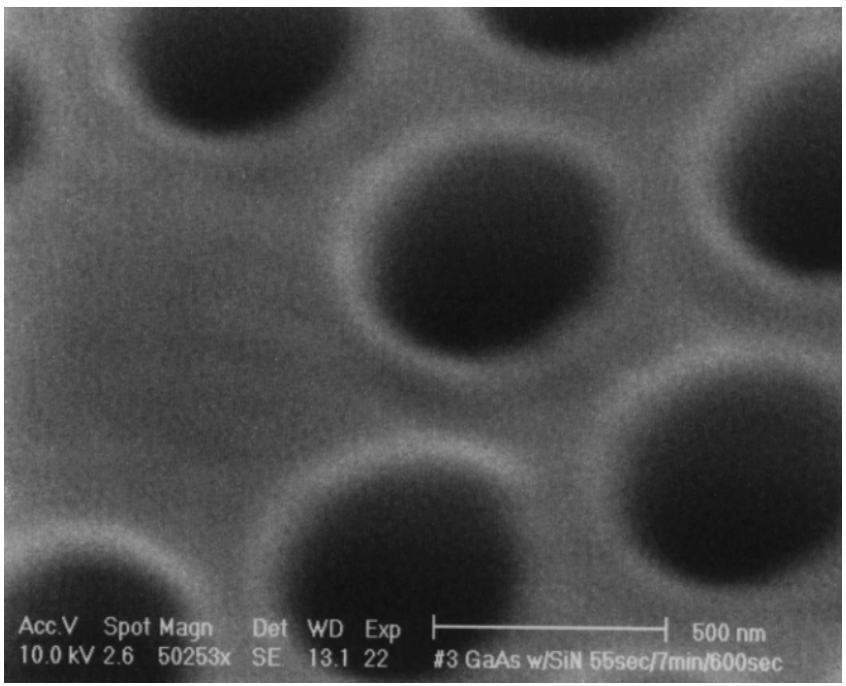

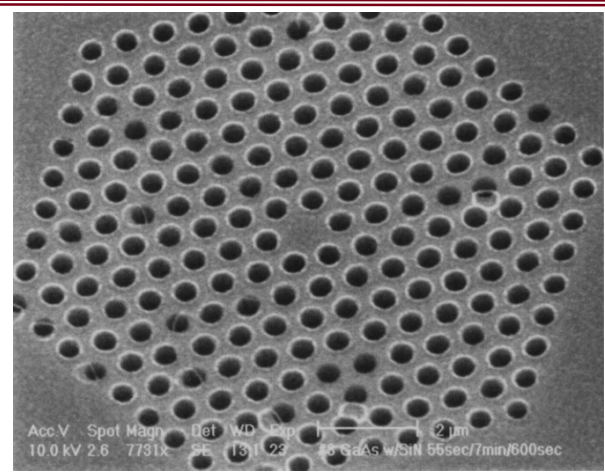

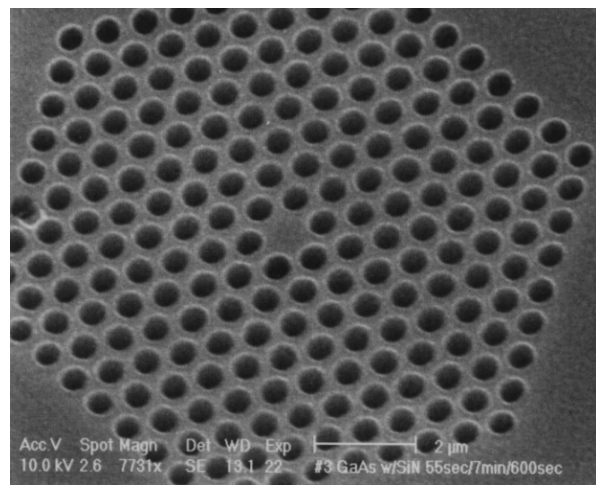

Magnitude of the Electric Field in the Defect Cavity

USC
University of Southern California

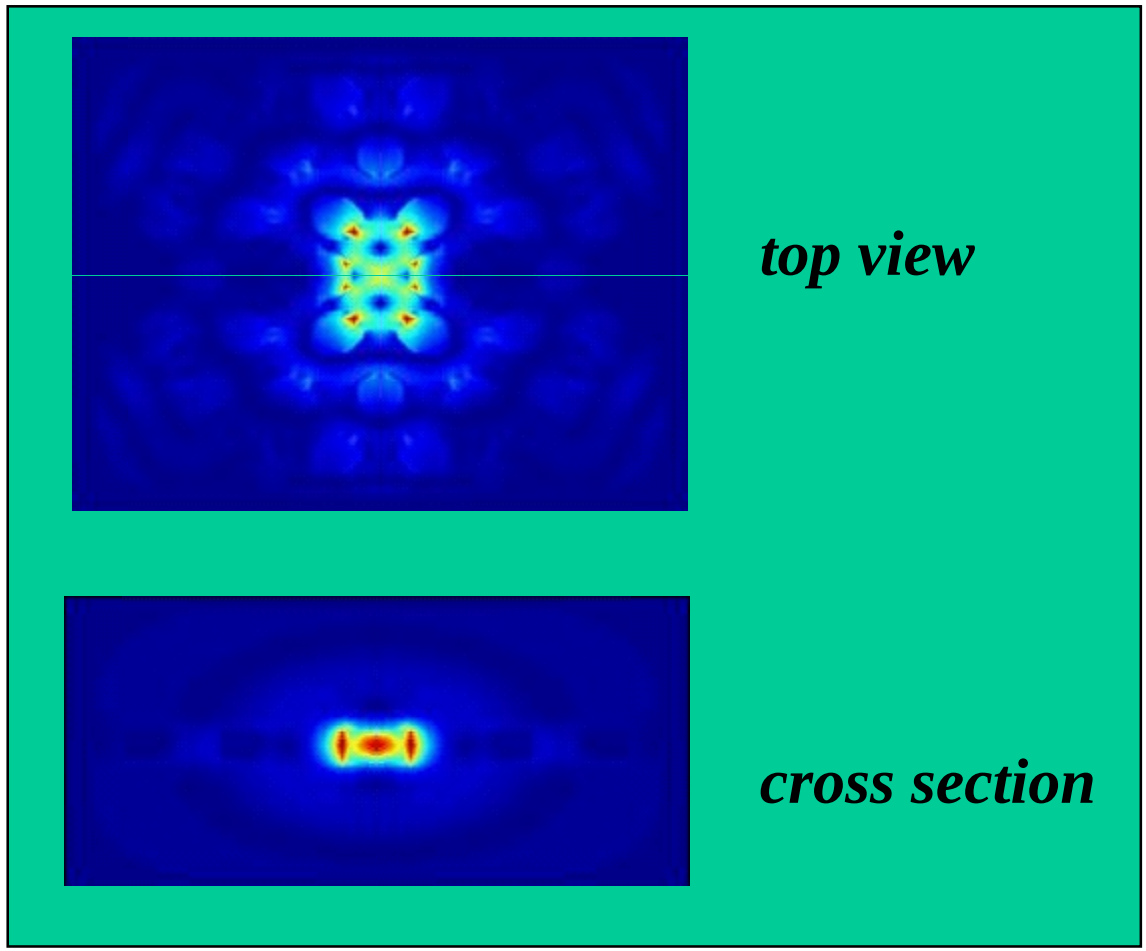

USC University of Southern California

One-Dimensional Lattices

sample after lithography

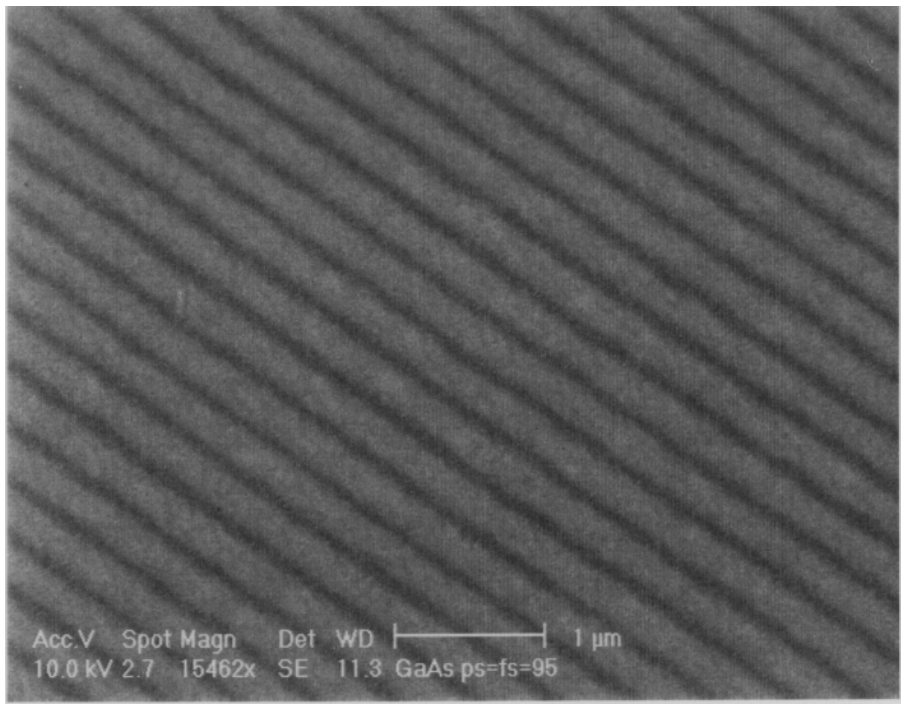

dispersion surface

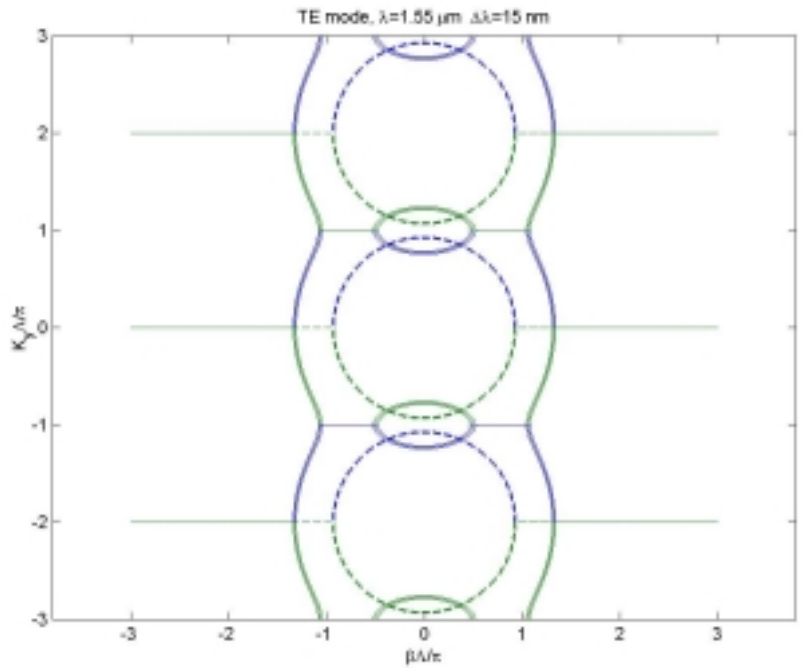

Superprism effect can be used for routing or multiplexing/demultiplexing

$$\vec{v}_g = \nabla_{\vec{k}}\omega(k)$$

Magnitude of the Electric Field in the Defect Cavity

USC
University of Southern California

symmetric cladding

top

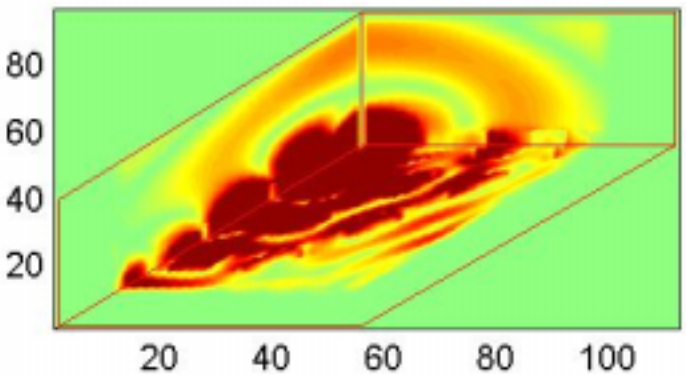

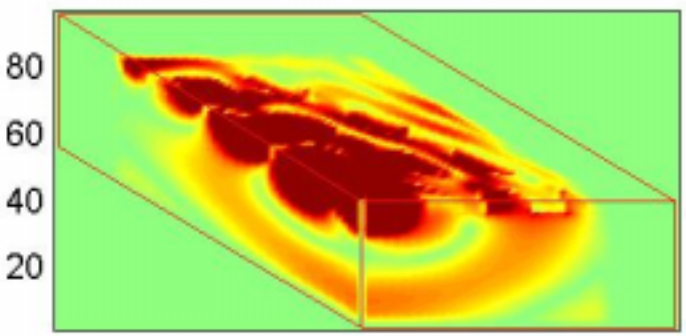

bottom

asymmetric cladding

top

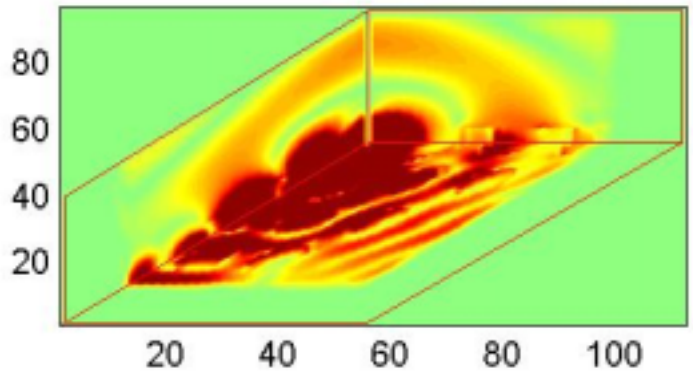

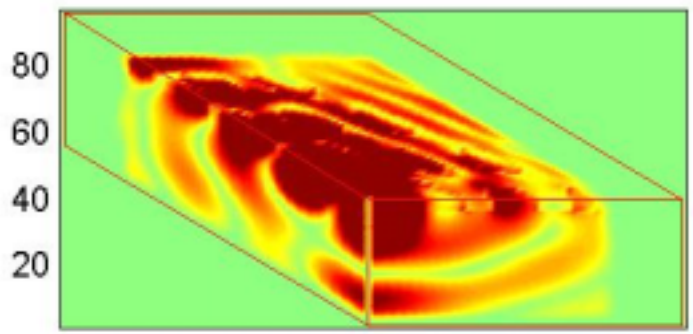

bottom

USC University of Southern California

μ Resonator Structures

Resonant Filter / Switch

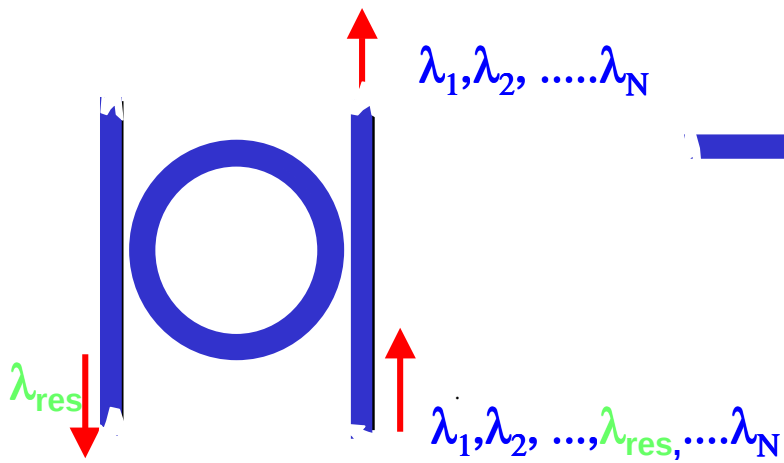

Resonant Y or Splitter

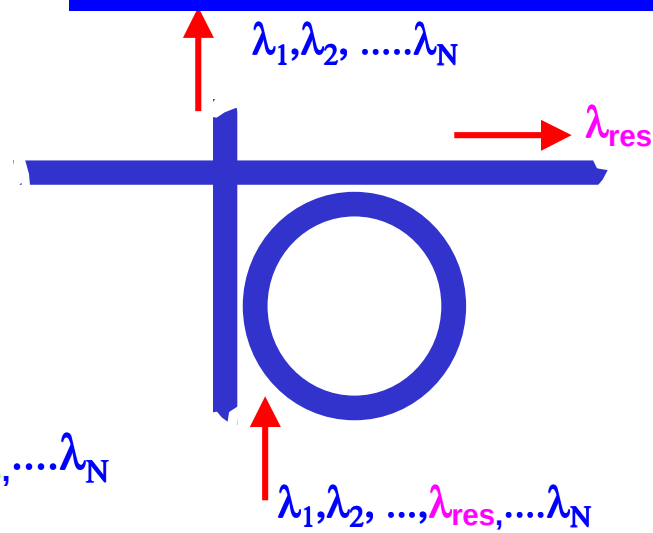

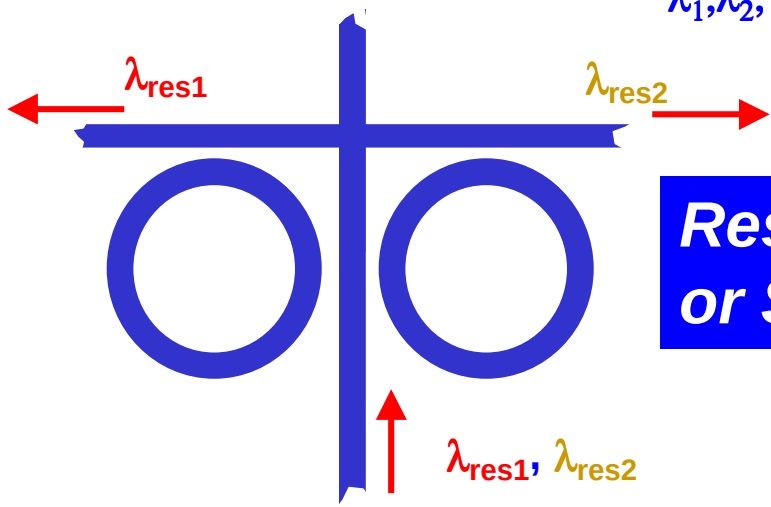

Resonant T or Splitter

Vertical Coupler Fabricated by Heterogeneous Integration

USC
University of Southern California

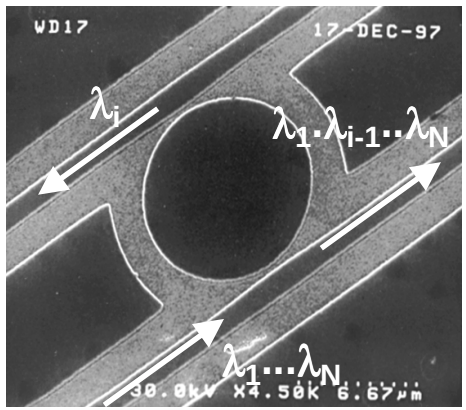

Laterally Coupled Disk
- Air Couping
- Sub Micron Control

OLD

NEW

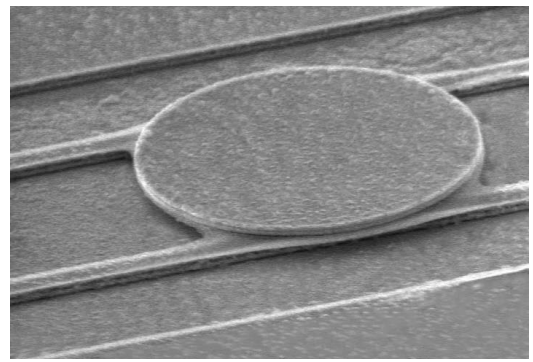

Vertically Coupled Disk
- Epi Layer Coupling
- Control Coupling by Epilayer Thickness

- **Add-Drop Filters**
- **Resonant Detectors**
- **Integrated Lasers**
- **Resonant Modulators**

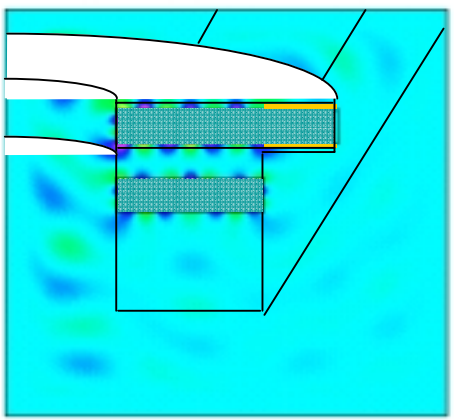

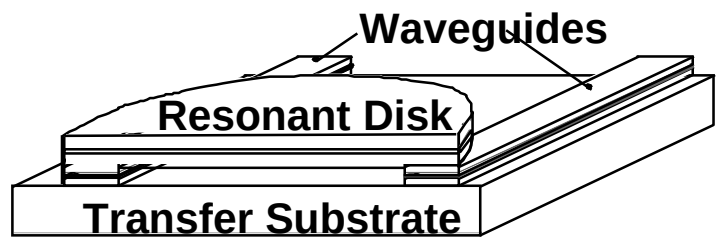

μ Disk Resonant Components

USC
University of Southern California

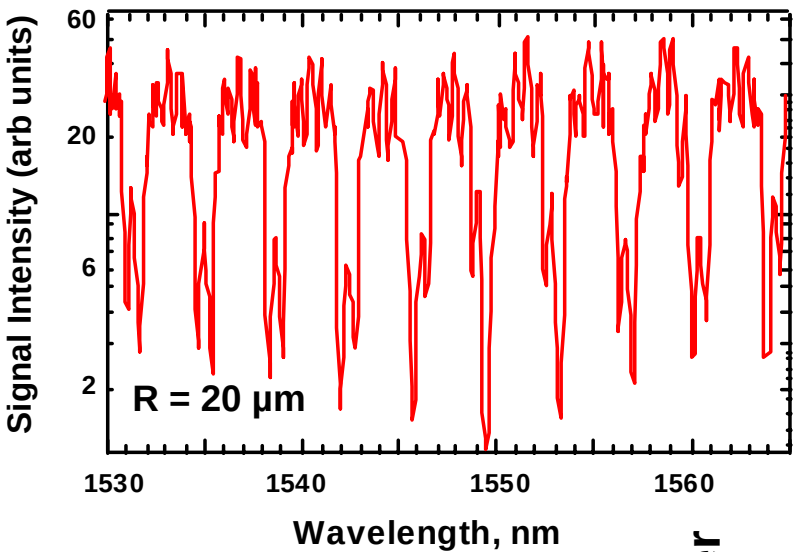

Passive μ disk coupler

Active μ disk tunable filter / switch